

## TECHNICAL SPECIFICATIONS

DATA	SRM 224	SRM 236	SRM 240	SRM 260	SRM 280
Rated Output					
650 ml - Beer Bottles	4000	6000	10000	18000	25000
250ml - Soft Drinks Bottles	7200	12000	15000	21000	30000
Filling Points	24	36	40	60	80
Sealing Elements	8	8	10	12	18
Kind of Sealing	CROWN CLOSURE				
Bottling Pressure	Max 6 Kg / Cm <sup>2</sup>				
Fill Temperature	4°C				
Installed Power	3 Kw	3 Kw	10 Kw	15 Kw	20 Kw
Water	1M <sup>3</sup> / Hr				
Air Consumption	15m <sup>3</sup> / Hr	15m <sup>3</sup> / Hr	30 m <sup>3</sup> / Hr	45 m <sup>3</sup> / Hr	60 m <sup>3</sup> / Hr
Weight	4 Tonne	5 Tonne	7 Tonne	9 Tonne	11 Tonne
Dimensions (M) L x W x H	2 x 1.8 x 2.2	2.2 x 2 x 2.2	5.4 x 2.3 x 2.8	5.4 x 3.5 x 2.8	5.4 x 4.5 x 2.8
Bottle Dimensions	Height 150 to 350 mm		Dia 50 to 90 mm		

### SALIENT FEATURES

- ✦ Vacuum Prevacuation of Bottles
- ✦ Automatic Central Lubrication
- ✦ Low Sound level
- ✦ Accurate Level Filling
- ✦ Splinter Spray off system
- ✦ High output
- ✦ Easy Cleaning
- ✦ Safety cut off switches with indicators
- ✦ Cleaning in place system (CIP)
- ✦ No Crown No Run
- ✦ Electronic Speed Variator
- ✦ Low maintenance
- ✦ Easy service

We also manufacture Washers, Premix Carbonators, Crate Washers, Cap Conveyors and other Bottling Equipments.

## SHIVSU CANADA PURE FILLERS PRIVATE LIMITED

(An Authority on Packaging Equipments)

Corporate Office: "Shivsu Towers", # 149, Poonamalle High Road, Kilpauk, Chennai - 600 010

Tel: +91 - 44 - 2836 2461 to 69, +91 - 44 - 2836 6840 - 44, Fax: +91 - 44 - 2836 2470

After Sales Support: +91 - 44 - 2836 2466 / 67


Email: mail@canadapurefillers.com Web: www.canadapurefillers.com

**HIGH SPEED  
Capacities  
60 - 400 BPM**



## BOTTLE FILLER CROWNER SRM 224 / 236 / 240 / 260 / 280



### SUPER FLOW VALVE WITH VACUUM PRE-EVACUATION

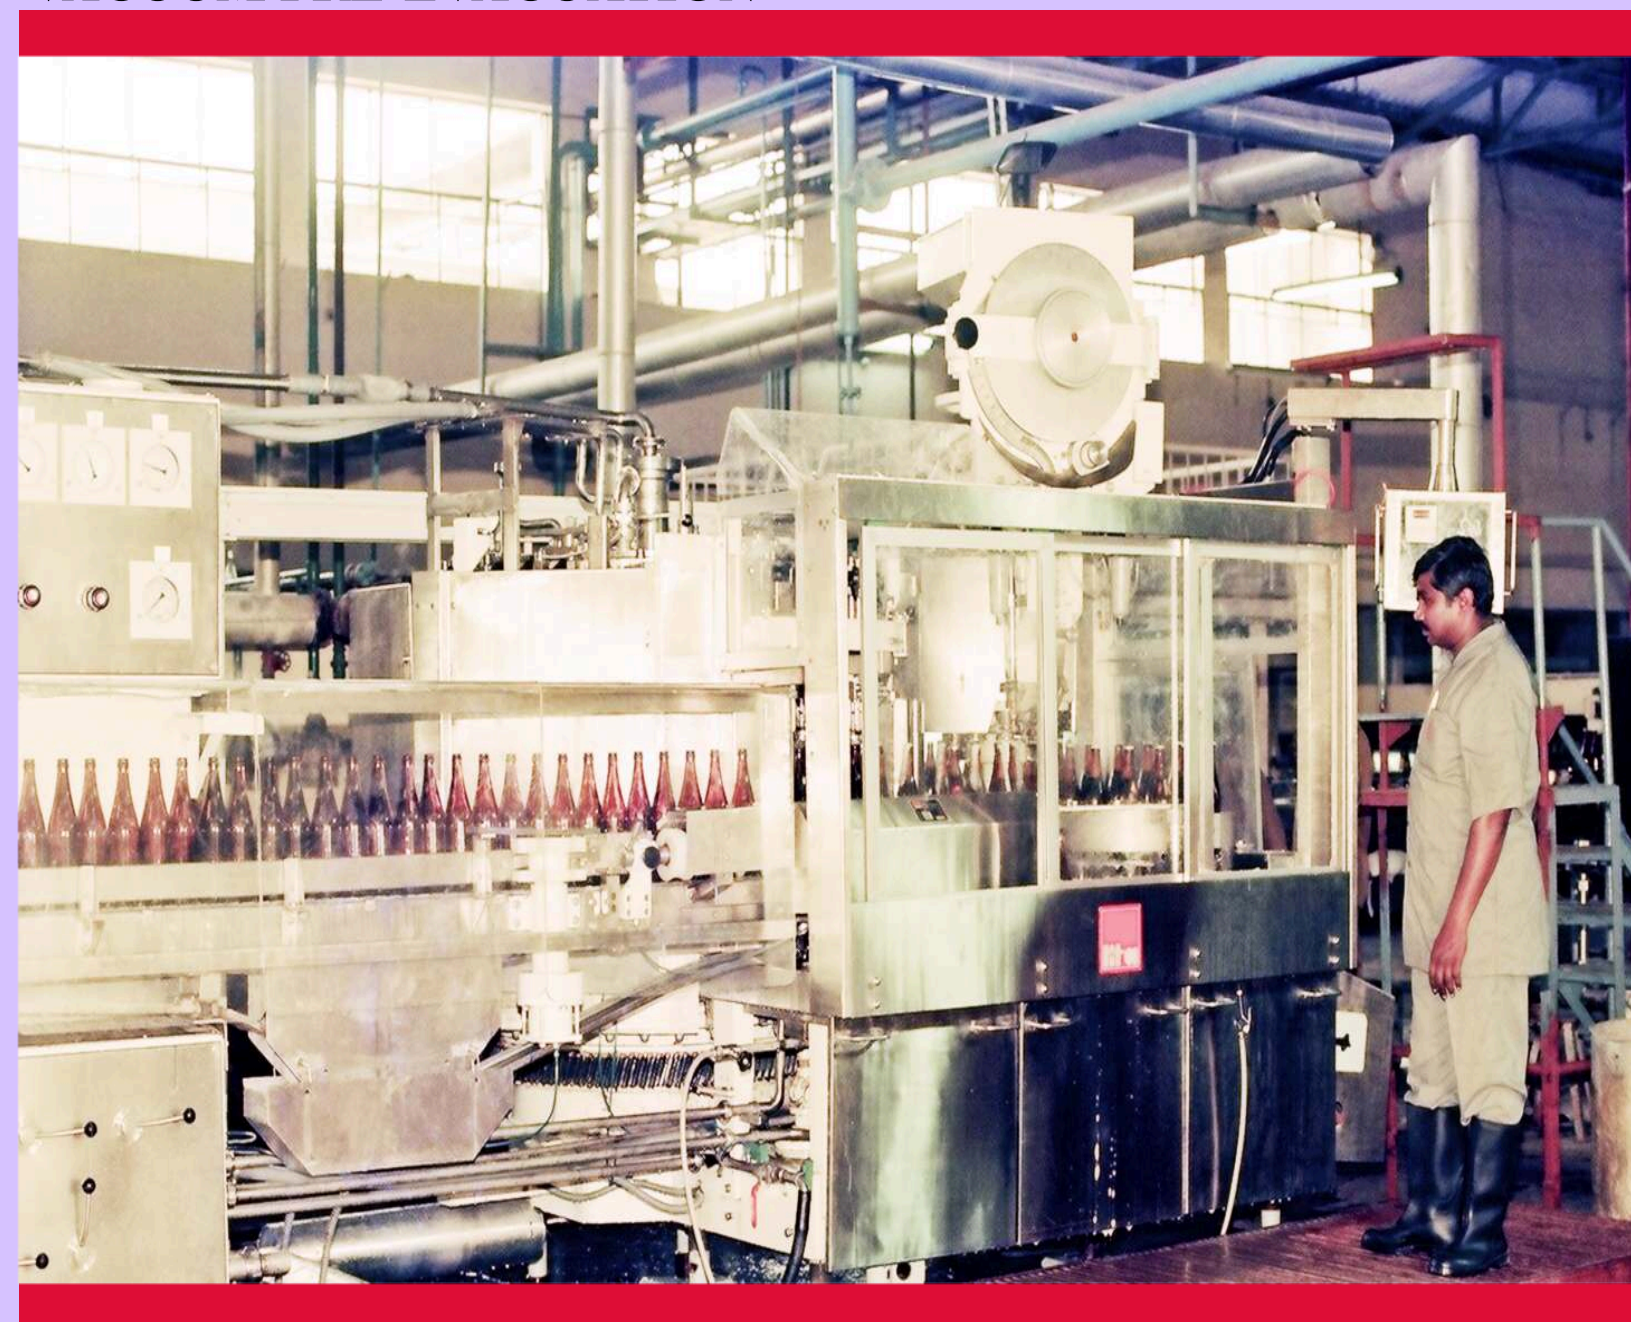

Manufacturers of Automatic Tunnel Pasteurizers and Coolers  
in Technical Collaboration with RITA BOTTLING



**GERMAN TECHNOLOGY**

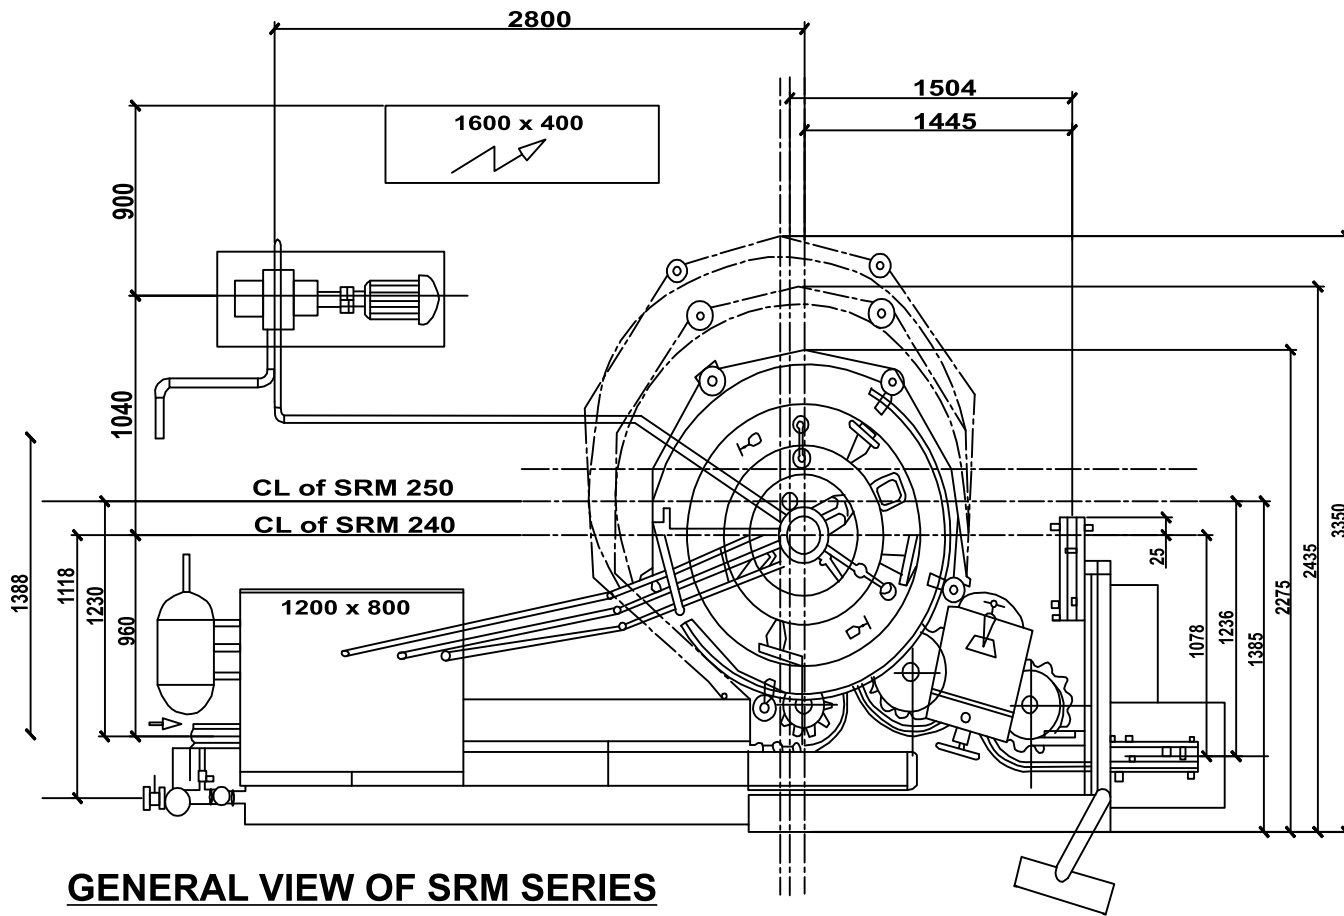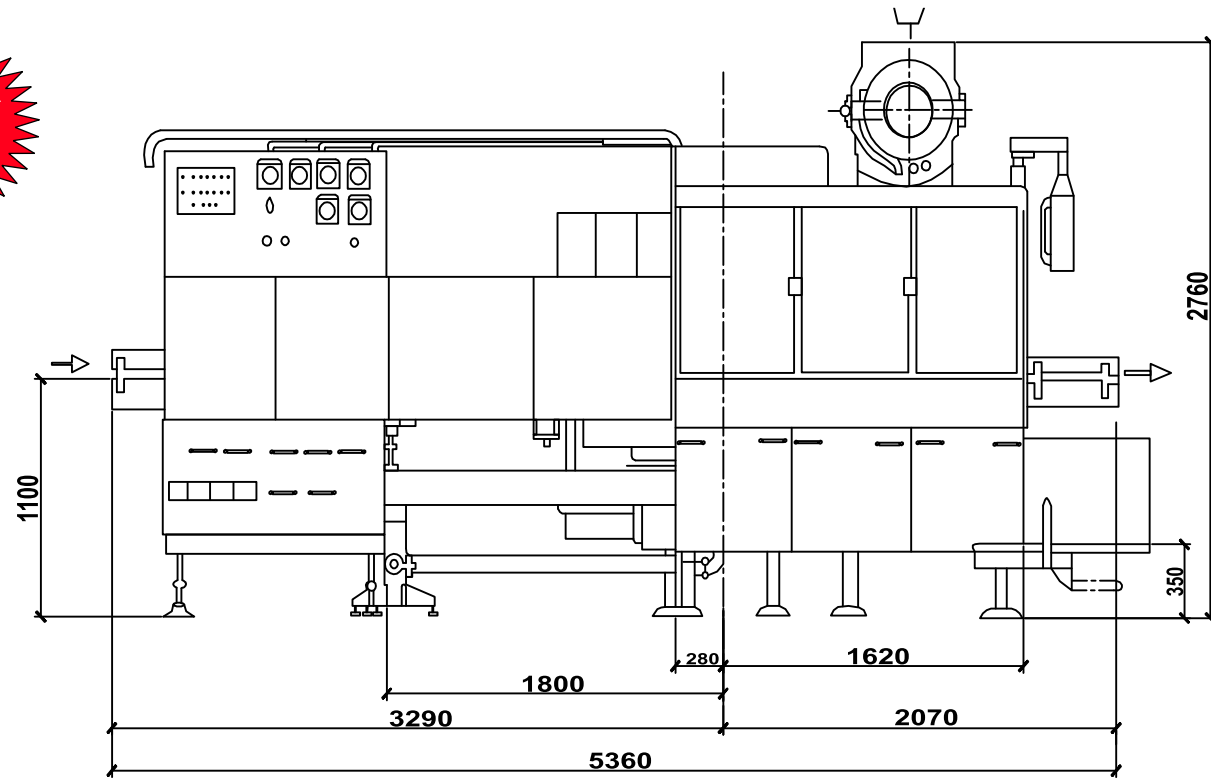

**GENERAL VIEW OF SRM SERIES**

DIMENSIONS			
MACHINE	Length	Width	Height
SRM 224	2060	1800	2200
SRM 236	2215	2040	2200
SRM 240	5360	2275	2760
SRM 260	5360	2435	2760
SRM 280	5360	3350	2760



Air Containing 21% Oxygen is detrimental to the stability and shelf life of beverages. The percentage of oxygen in the bottled product has to be reduced to a minimum since it is a risk for preservation of the bottled beverage. The Vacuum pre-  
evacuation system ensures removal of oxygen during filling to give a packaged product of International Standards.

hence high stability and shelf life. The Valves are suitable for filling under CO<sub>2</sub> Counter Pressure. While using CO<sub>2</sub> pre-pressing, one-third Air Consumption will be replaced by CO<sub>2</sub>.

The equipment has Cleaning in Place (CIP) Facility. The equipment has an Automatic Central Lubrication System.

Ideal for Bottled Beverages such as Beer, Cola, Lemonade and Champagne. These filling machines incorporate the latest in filling technology for carbonated beverages. The filling valves are designed to prevacuate the bottles before filling. This ensures very low oxygen content in the product as per international standards, and

The machine has safety cut off switches, Automatic Splinter Spray-off System, height adjustment of bowl suitable for all bottle size up to 1000ml. These filling machines are designed for Accurate level filling without beverage loss.

